



**Koble GOLD til Swegon  
INSIDE Cloud**



# Hvilke produkter er INSIDE Ready?

## **GOLD-enheter produsert i uke 22, 2023 eller senere.**

- Programvareversjon 2.41 eller nyere
- Sertifikater installert i produksjonen på produkter produsert fra uke 22, 2023

## **Ettermontering**

- Programvareversjon 2.42 eller nyere
- GOLD-versjon E / F




Hvordan kobles en GOLD-  
enhet til?

# Koble GOLD til internett


## 1. Ethernet-tilkobling

Koble **den** ene enden av nettverkskabelen til anleggets eksisterende nettverk og den andre enden av kabelen til luftbehandlingsenheten (IQLogic).

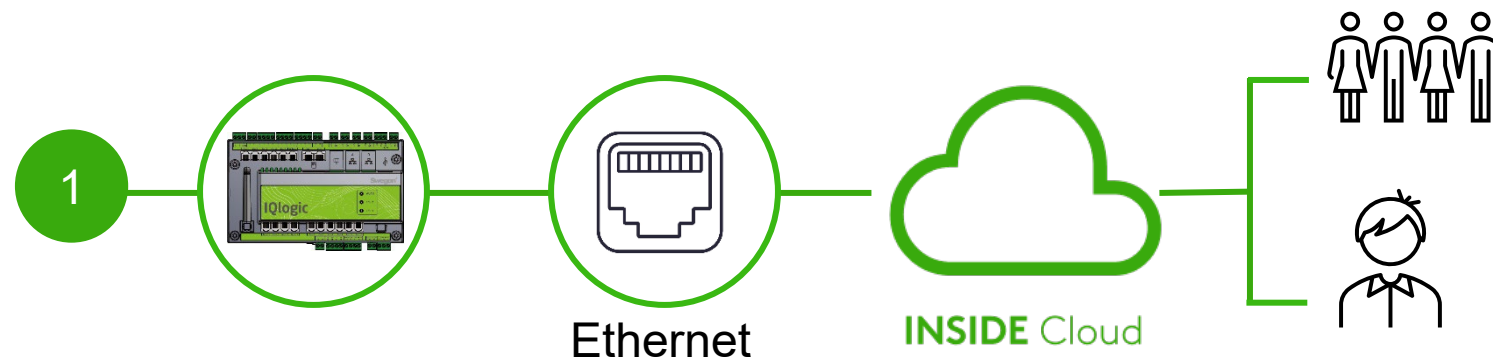

## 2. Mobilt nettverk

Bruk en 4G-ruter med SIM-kort, spesielt utviklet for dette formålet.

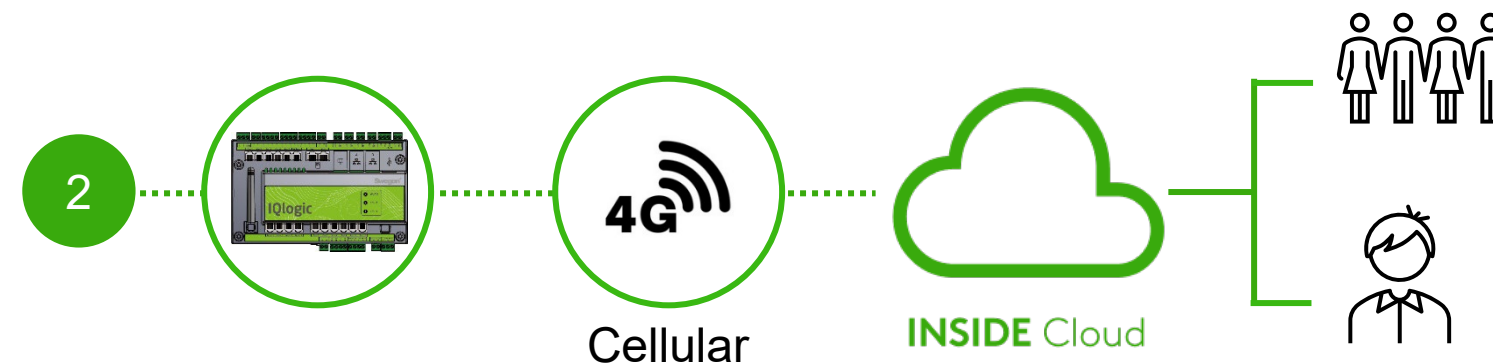


# Aktiver Swegon INSIDE på HMI/Web



Gå til "Kommunikasjon"

Kontroller at følgende felter er riktig utfyllt:

- IP-adresse, nettverksmaske, standard gateway, primær DNS
- Produktets serienummer

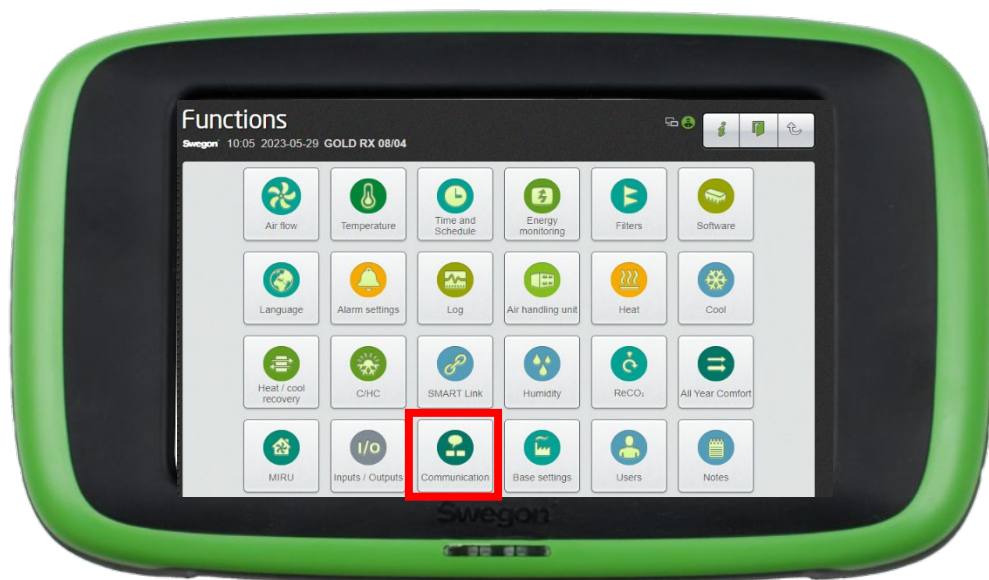

# Opprett en konto

- Gå til [Swegons nettsted](#)
  - Support og programvare → Tilkoblede produkter
- 1 Be om tilgang til INSIDE-portalen
- 2 Fyll ut skjemaet og klikk på "Send"
- Vent deretter på e-posten som inviterer deg til INSIDE Portal

**Kom igång!**

1. Begär åtkomst till INSIDE Portal ▼

2. Lägg till produkter i INSIDE Portal/Gör din produkt INSIDE Ready (endast för retrofit) ▼

3. Gå till INSIDE Portal ▼

**Kom igång!**

1. Begär tillgång till INSIDE Portal ^

**Ange uppgifterna nedan för att begära ett konto.**

Om du redan har ett konto och vill lägga till en ny produkt eller byggnad, kontakta [digitalservices@swegon.com](mailto:digitalservices@swegon.com)

**Kontoinformation**

Email (används som användarnamn)\*

Förnamn\*

Efternamn\*

Företag\*

**Byggnads- och produktinformation**

Välj produkt\*  
Välj ▼

Produktens serienummer\*

Byggnadens namn\*

Byggnadens adress\*

Ort\*

Land\*  
Välj ▼

Din integritet är viktig för oss. Swegon använder dina uppgifter till att förse dig med information om den begärda tjänsten. Du kan avregistrera dig från denna kommunikation när som helst. För mer information, se vår integritetspolicy.


skyddas av reCAPTCHA  
inmatning - Viktor

**SKICKA**

# 1. Logg inn på INSIDE Portal

## Swegon INSIDE Portal

- <https://inside.swegon.com>

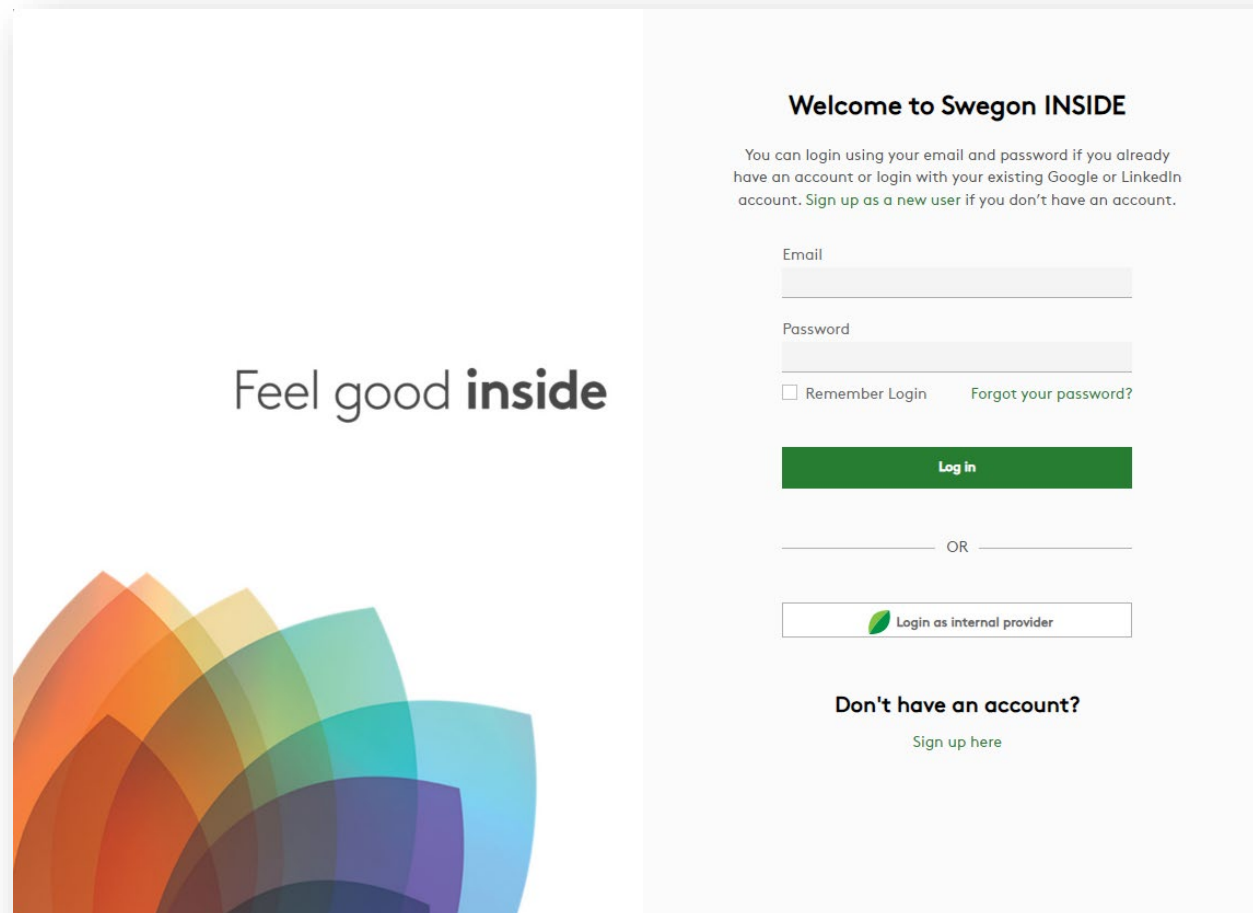

The screenshot shows the Swegon INSIDE Portal login interface. On the left, there is a decorative graphic of overlapping semi-circles in various colors (orange, yellow, green, blue, purple) and the text "Feel good **inside**". On the right, the login form is titled "Welcome to Swegon INSIDE". It includes a message: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." Below this are input fields for "Email" and "Password". There is a checkbox for "Remember Login" and a link for "Forgot your password?". A green "Log in" button is positioned below the password field. Below the button is an "OR" separator. Underneath is a button labeled "Login as internal provider" with a small green leaf icon. At the bottom, there is a section titled "Don't have an account?" with a link "Sign up here".

Feel good **inside**

**Welcome to Swegon INSIDE**

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.


Email  
[Input field]

Password  
[Input field]

Remember Login    [Forgot your password?](#)

**Log in**

OR

 Login as internal provider

**Don't have an account?**  
[Sign up here](#)

## 2. Gå til bygningssiden

The screenshot displays the Swegon user interface for an organization. The breadcrumb trail at the top reads "Home > Organisations > Company Name". A "GO BACK" button is on the left, and an "EDIT ORGANISATION" button is on the right. The main heading is "Company Name".

The "Buildings" section is highlighted with a red circle. It contains a search bar labeled "Search for building name" with a magnifying glass icon. Below the search bar is a table with the following data:


Name	City	Country	Number of products	Role
Head Office	Stockholm	Sweden	0	Organisation Admin

At the bottom of the table, it says "Rows per page: 100" and "1-1 of 1". Below the table are two expandable sections: "Organisation administrators" and "App users".

The left sidebar contains several icons: a menu icon, a user icon, a building icon, a search icon, a notification icon, and a bell icon. At the bottom left, there is a "PA" button.



# 3. Klick på "CLAIM PRODUCT"

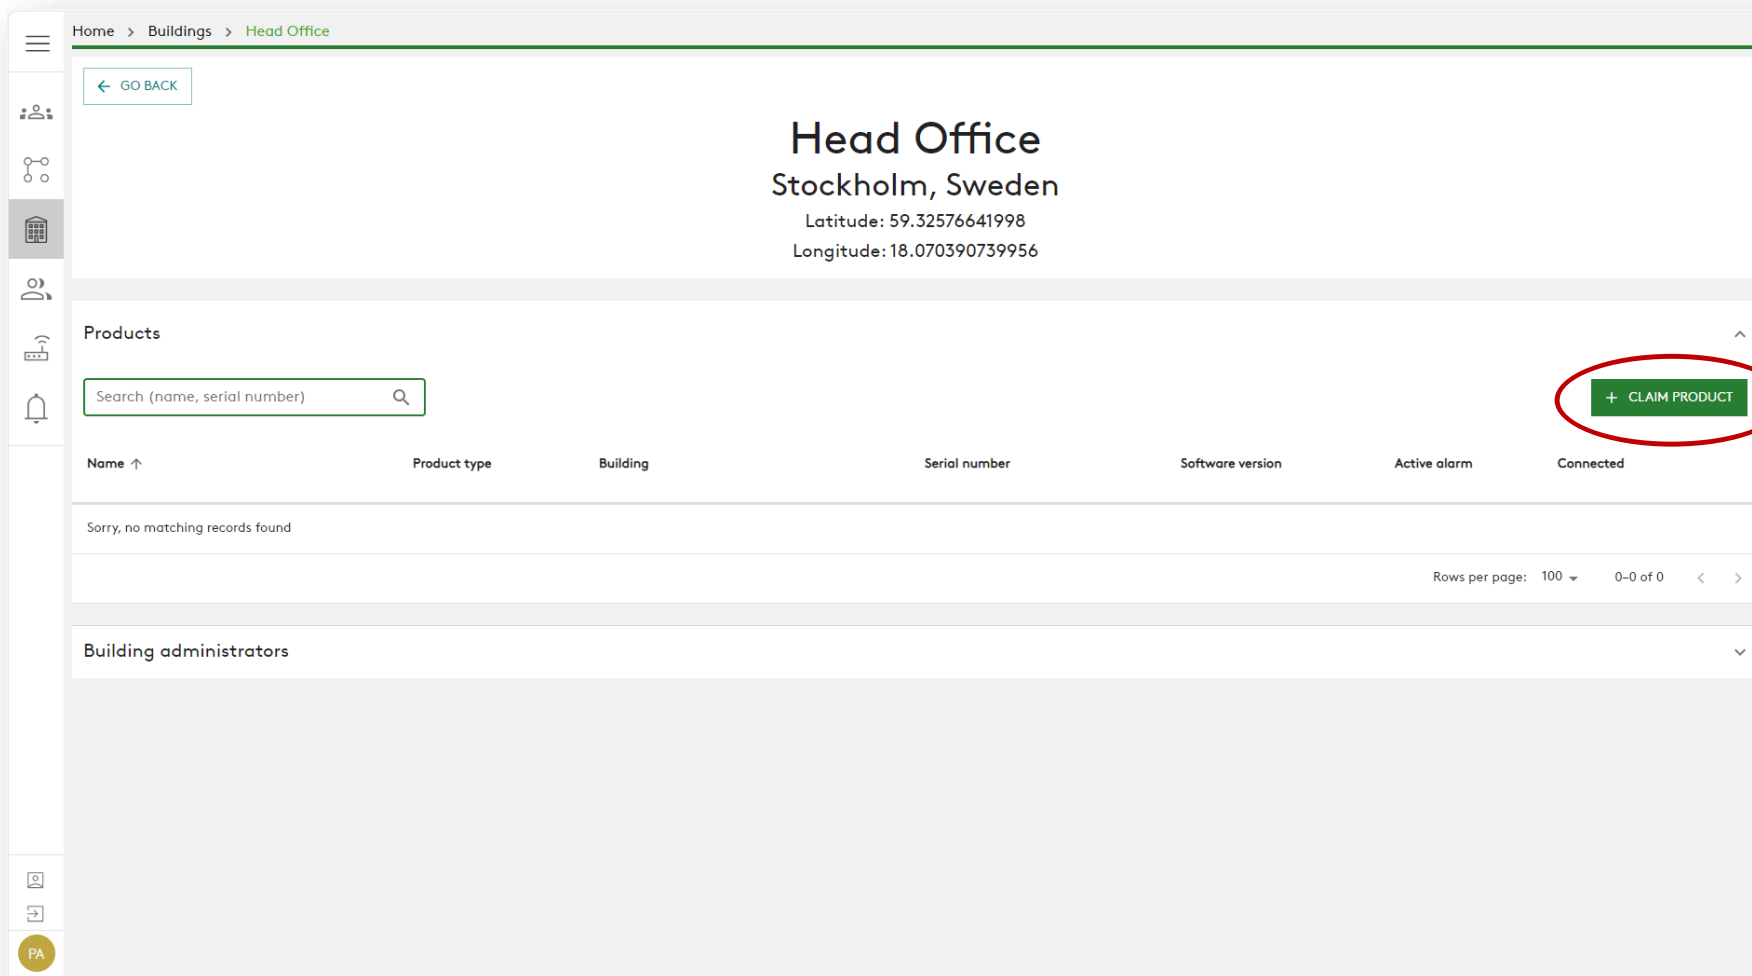

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden  
Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number) 🔍

**+ CLAIM PRODUCT**

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
Sorry, no matching records found						

Rows per page: 100 ▾ 0-0 of 0 < >

### Building administrators

PA

4. Skriv inn produktets serienummer, og trykk rett utenfor tekstboksen for å bekrefte. Når du har klikket utenfor tekstboksen, kan du legge til flere serienumre på samme måte.

The screenshot displays the Swegon web interface for a building named 'Head Office' in Stockholm, Sweden. The interface includes a navigation menu on the left, a breadcrumb trail (Home > Buildings > Head Office), and a 'GO BACK' button. The main content area shows the building name, location, and coordinates. Below this, there is a 'Products' section with a search bar and a table. A modal dialog box titled 'Claim product(s)' is open, providing instructions on how to claim a product and a text input field for the serial number. The dialog also includes a 'SUBMIT' button and a note about where to find the serial number on the product's internal website.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number) 🔍

Name ↑	Product type	B	Software version	Active alarm	Connected
Sorry, no matching records found					

Rows per page: 100 ▾ 0-0 of 0 < >

### Building administrators

#### Claim product(s)

Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services.

Serial number(s)

The serial number can be found on the product's internal website under the 'Communication' tab

✓ SUBMIT

+ CLAIM PRODUCT

5. Før du klikker på Submit, må du navngi enhetene dine. Trykk deretter på Send.

Hvis produktet allerede er koblet til INSIDE Cloud, må du oppgi produktets MAC-adresse for å gjøre krav på det.

Home > Buildings > Head Office

Head Office  
Stockholm, Sweden

Claim product(s)

Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services.

Serial number(s)

1111111111 1122112211

The serial number can be found on the product's internal website under the 'Communication' tab

Name

The following product(s) needs a name to be able to be added to the building.

1111111111 GOLD name\*

1122112211 GOLD name\*

SUBMIT

Products

Search (name, serial number)

Name ↑ Product type

Sorry, no matching records found

Building administrators

Software version Active alarm Connected

Rows per page: 100 0-0 of 0

+ CLAIM PRODUCT

## 6. Nå har du konfigurert produktene dine.

Home > Buildings > Head Office

← GO BACK

### Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

#### Products

Search (name, serial number)

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

#### Building administrators

PA

7. Hvis produktene er frakoblet (som vist nedenfor), må du kontrollere at Swegon INSIDE er aktivert på produktet og at det har et gyldig sertifikat (INSIDE Ready).

The screenshot displays the Swegon INSIDE web interface for a building named 'Head Office' in Stockholm, Sweden. The interface includes a navigation menu on the left, a breadcrumb trail (Home > Buildings > Head Office), and a 'GO BACK' button. The main content area shows the building name and location, along with its latitude and longitude coordinates. Below this, there is a 'Products' section with a search bar and a '+ CLAIM PRODUCT' button. A table lists two products, both of which are disconnected, as indicated by red dots in the 'Connected' column. The table has columns for Name, Product type, Building, Serial number, Software version, Active alarm, and Connected. At the bottom, there is a 'Building administrators' section which is currently empty.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number)

+ CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

### Building administrators




**Hvis produktet ditt ikke har et gyldig  
sertifikat:**

Slik gjør du produktet ditt INSIDE Ready  
(Retrofit)

# Sørg for at du har SW 2.42 eller nyere

## Ettermontering

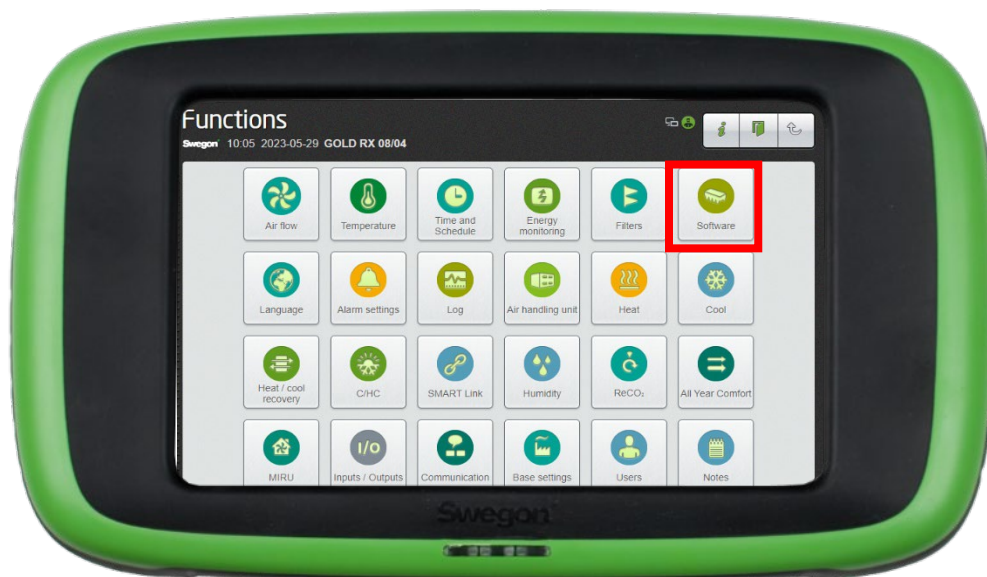

# Aktiver Swegon INSIDE på HMI/Web


## Ettermontering



Gå til "Kommunikasjon"

Kontroller at følgende felter er riktig utfyllt:

- IP-adresse, nettverksmaske, standard gateway, primær DNS
- Produktets serienummer

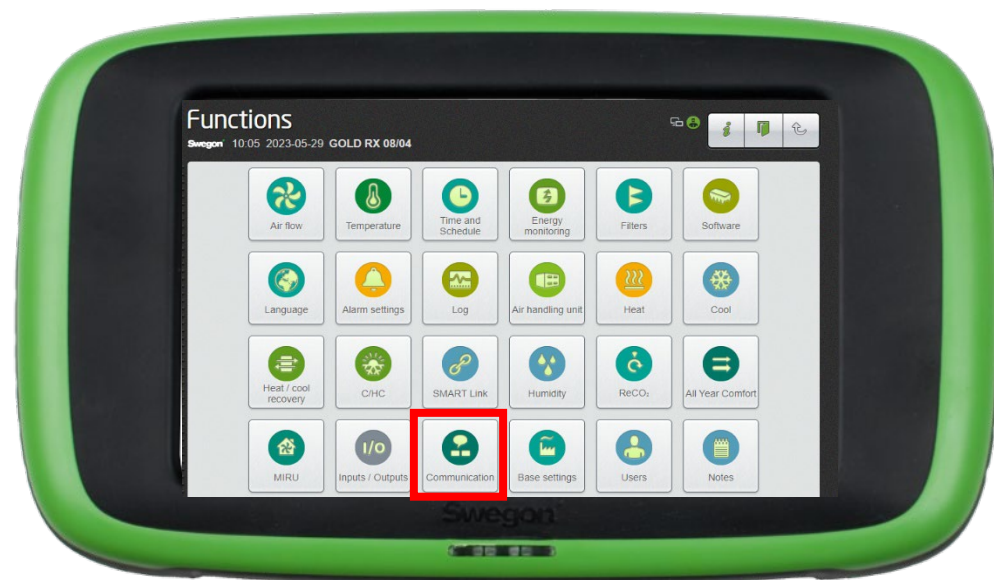



1. Gå til bygningen din og klikk på produktet du vil gjøre INSIDE Ready.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden  
Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number)

+ CLAIM PRODUCT


Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

### Building administrators


PA

## 2. Trykk på knappen "MAKE INSIDE READY".

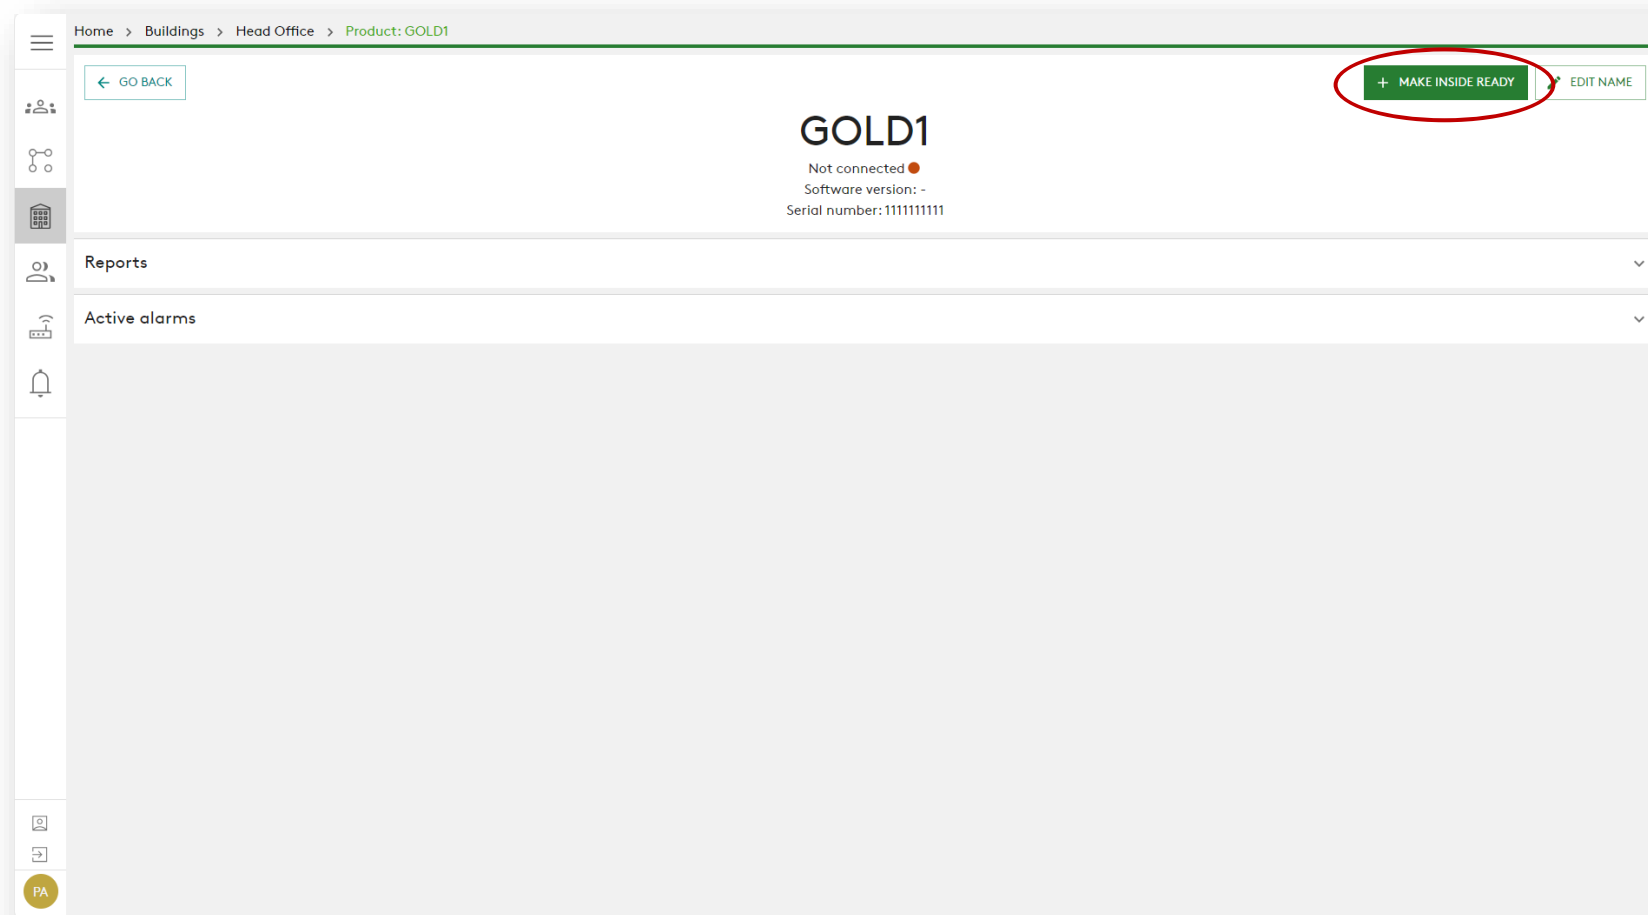

The screenshot displays a web interface for a Swegon device. At the top, a breadcrumb trail reads "Home > Buildings > Head Office > Product: GOLD1". Below this, a navigation bar contains a "GO BACK" button on the left and two buttons on the right: "+ MAKE INSIDE READY" (highlighted with a red circle) and "EDIT NAME". The main content area features the device name "GOLD1" in large text, followed by the status "Not connected" with a red dot, "Software version: -", and "Serial number: 1111111111". Below the main content are two expandable sections: "Reports" and "Active alarms", each with a downward arrow. A vertical sidebar on the left contains several icons, and a "PA" button is visible at the bottom left corner.

### 3. Skriv inn MAC-adressen til produktet, og trykk på "SUBMIT".

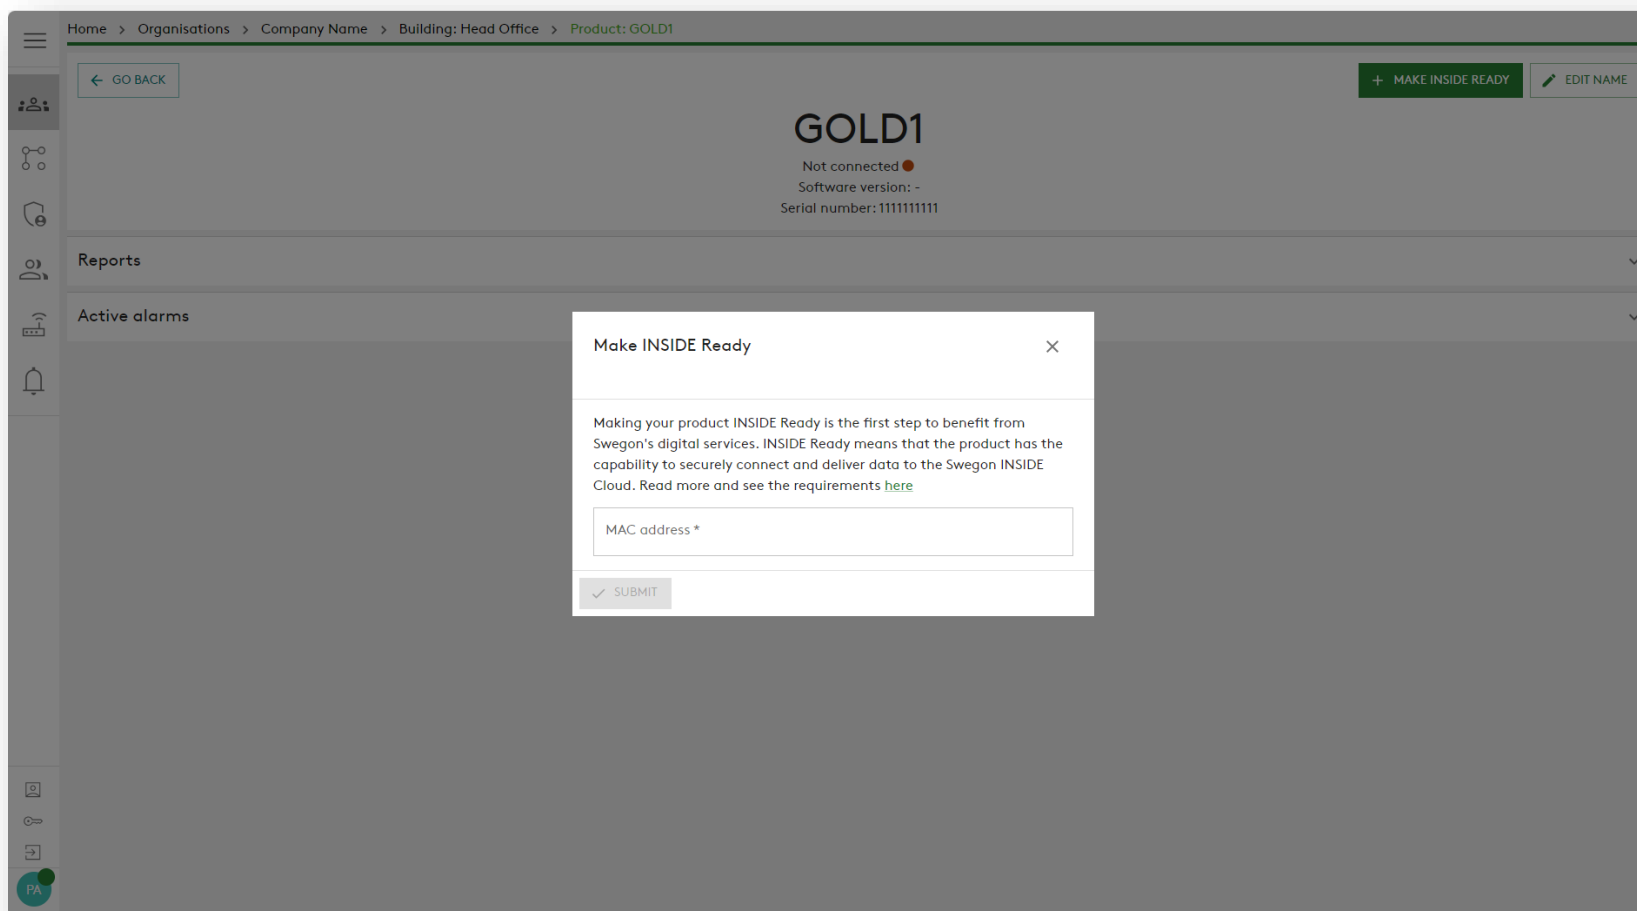

The screenshot shows a web interface for a product named 'GOLD1'. The breadcrumb navigation at the top reads: Home > Organisations > Company Name > Building: Head Office > Product: GOLD1. In the top right corner, there are two buttons: '+ MAKE INSIDE READY' and 'EDIT NAME'. The main content area displays 'GOLD1' with a status indicator 'Not connected' (a red dot), 'Software version: -', and 'Serial number: 1111111111'. Below this, there are sections for 'Reports' and 'Active alarms', both with expandable arrows. A modal dialog box titled 'Make INSIDE Ready' is open in the center. It contains the following text: 'Making your product INSIDE Ready is the first step to benefit from Swegon's digital services. INSIDE Ready means that the product has the capability to securely connect and deliver data to the Swegon INSIDE Cloud. Read more and see the requirements [here](#)'. Below the text is a text input field labeled 'MAC address \*'. At the bottom of the dialog is a 'SUBMIT' button with a checkmark icon.

Home > Organisations > Company Name > Building: Head Office > Product: GOLD1

← GO BACK

+ MAKE INSIDE READY EDIT NAME

## GOLD1

Not connected ●  
Software version: -  
Serial number: 1111111111

Reports


Active alarms

### Make INSIDE Ready

Making your product INSIDE Ready is the first step to benefit from Swegon's digital services. INSIDE Ready means that the product has the capability to securely connect and deliver data to the Swegon INSIDE Cloud. Read more and see the requirements [here](#)

✓ SUBMIT

3. Kopier ID-en og aktiveringskoden, lim dem inn i det aktuelle tekstfeltet i produktets HMI, og trykk på "Activate".

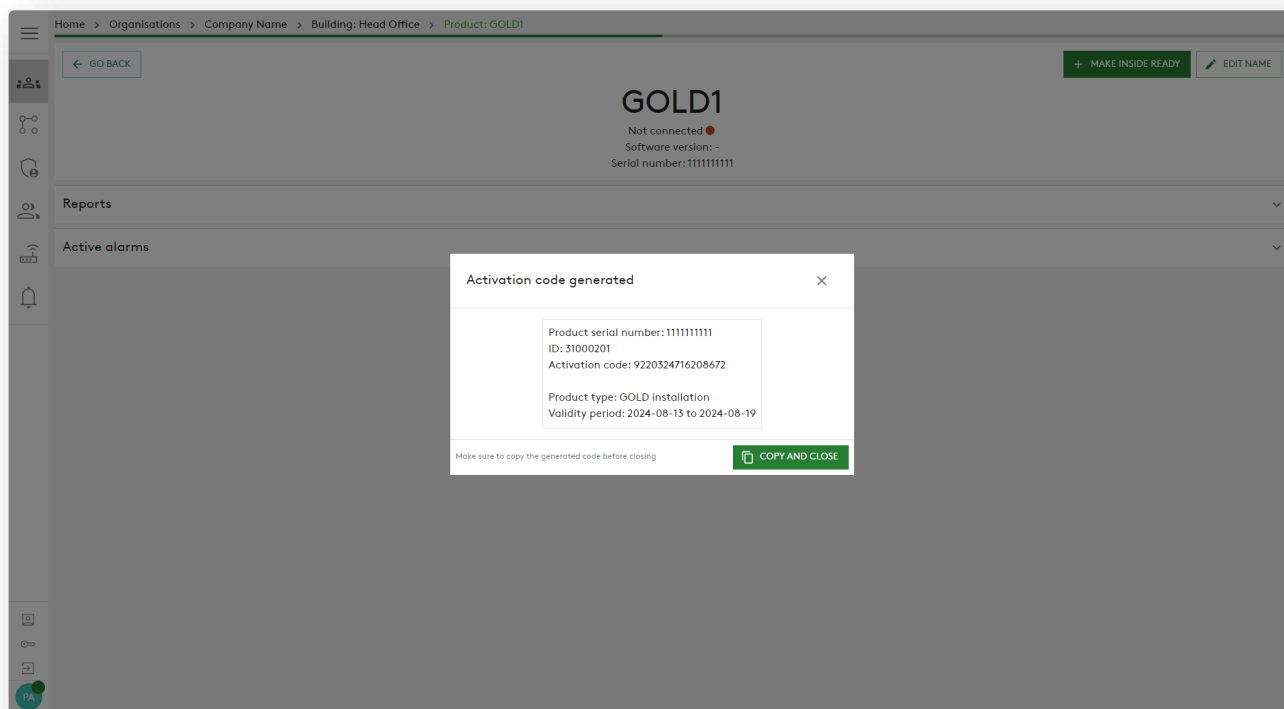

For GOLD-enheter finner du tekstfeltene under "Kommunikasjon"

4. Når produktene er tilkoblet og deler data med INSIDE Cloud, lyser punktene grønt.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number) 🔍

+ CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

### Building administrators

# INSIDE Portal

INSIDE Portal er plattformen for alle tilkoblede Swegon-produkter og knutepunktet for Swegons digitale tjenester


# INSIDE Portal

- Knutepunktet for alle tilkoblede Swegon-produkter.

INSIDE Portal gir deg muligheten til å:

- Overvåk viktige parametere
  - Status for luftstrøm, trykkfall, temperaturer osv.
  - Aktive alarmer
- Opprett og eksporter energirapporter
- Få overordnet innsikt i AHU-ytelsen
- Aktiver enkelt tilleggstjenester som kan øke effektiviteten til systemet ditt
- Inviter portalbrukere til å dele innsikt og delegere tilgangsnivå

INSIDE Portal er gratis

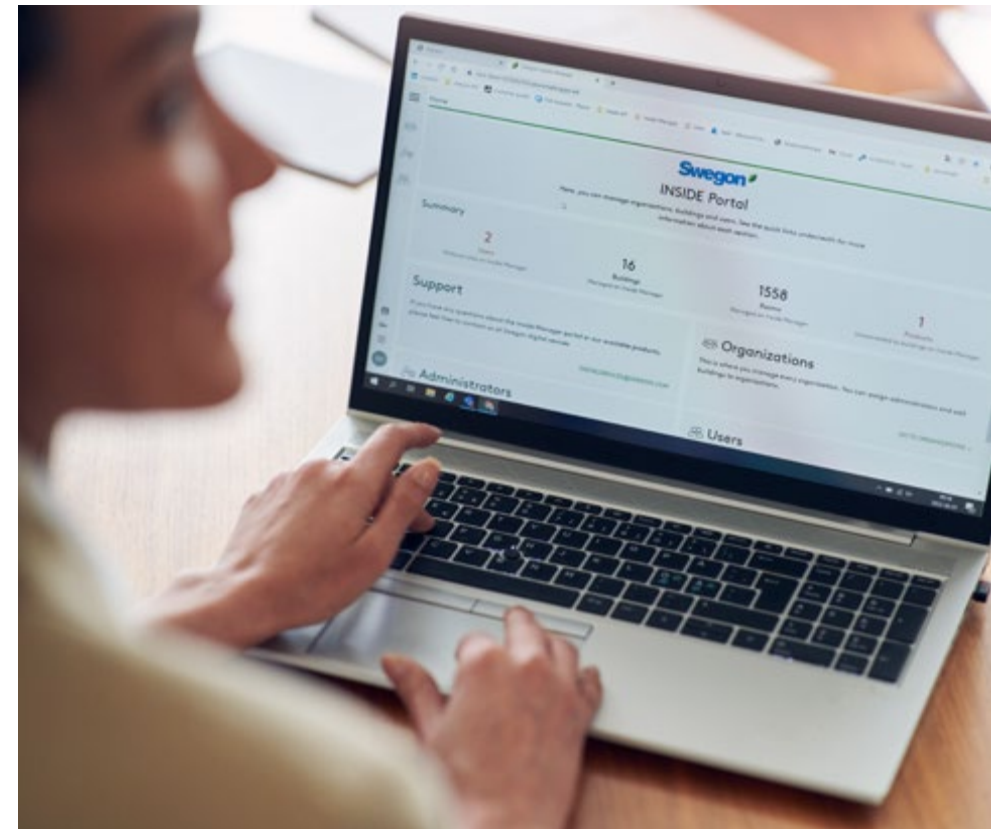

# INSIDE Portal - Alarmvarsler via e-post

## Få alarmvarsler til e-posten din fra tilkoblede enheter

Home > Alarm subscriptions

My alarm subscriptions

Search for any keyword

DELETE SELECTED EDIT SELECTED + ADD ALARM SUBSCRIPTION

<input type="checkbox"/>	Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
<input type="checkbox"/>	Kv Målet 1, Umeå	A B	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	Åbyhøj GOLD	A B	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
<input type="checkbox"/>	Zeta Sky Hi R7 (R32)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Titan Sky Hi R0 HP	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	GEYSER Sky R0 (R290)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Epsilon Sky Hi	A	Swegon Cantarana	Cantarana	Italy	BlueBox Epsilon SKY	Swegon
<input type="checkbox"/>	Boställsvägen 1 Örebro	A B I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	SWEGON BUREAU	A B I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
<input type="checkbox"/>	Zeta Rev	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	TA/FA 73	A B I	Swegon Kvånum	Kvånum	Sweden	GOLD	Swegon
<input type="checkbox"/>	OPEN SPACE	A	Swegon Cantarana	Cantarana	Italy	GOLD	Swegon



# INSIDE Portal - Varsler via e-post

Velg hvilke varsler du ønsker å bli informert om via epost

**My alarm subscriptions**

Search for any keyword

- Product name
- Zeta Sky Hi R7 (R32)
- Titan Sky Hi R0 HP
- GEYSER Sky R0 (R290)
- Epsilon Sky Hi
- Zeta Rev
- OPEN SPACE

**Add alarm subscriptions**

Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T					
Boställsvägen 1 Örebro	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
SWEGON BUREAU	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
TA/FA 73	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Kvänum	Kvänum	Sweden	GOLD	Swegon
Åbyhøj GOLD	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
Kv Målet 1, Umeå	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
TA 12	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Gothenburg	Gothenburg	Sweden	GOLD	Swegon
GOLD 2005646491	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Sundsvall	Sundsvall	Sweden	GOLD	Swegon
Swegon - Brandby	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Brandby	Brandby	Denmark	SuperWISE	Swegon Denmark
Swegon Malmö	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Malmö	Malmö	Sweden	SuperWISE	Swegon
Swegon Goteborg	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Gothenburg	Gothenburg	Sweden	SuperWISE	Swegon
LB03 Luleå	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Luleå	Luleå	Sweden	GOLD	Swegon
GOLD Umeå	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Umeå	Umeå	Sweden	GOLD	Swegon
Norrkøping kontor	<input type="radio"/> A <input type="radio"/> B <input type="radio"/> T	Swegon Norrkøping	Norrkøping	Sweden	SuperWISE	Swegon

EDIT SELECTED + ADD ALARM SUBSCRIPTION

SUBMIT

# INSIDE Portal: Oversikt over tilkoblede enheter

Home > buildings

### Buildings

Search for building name

Name ↑	City	Country	Number of products	Organization
Swegon Borås	Borås	Sweden	1	Swegon
Swegon Cantarana	Cantarana	Italy	3	Swegon
Swegon France Lyon	Lyon	France	1	Swegon
Swegon Gembloux	Gembloux	Belgium	1	Swegon
Swegon Gothenburg	Gothenburg	Sweden	1	Swegon
Swegon Kvänum	Kvänum	Sweden	3	Swegon
Swegon Kvänum Testcenter	Kvänum	Sweden	2	Swegon
Swegon Luleå	Luleå	Sweden	1	Swegon
Swegon Malmö	Malmö	Sweden	1	Swegon
Swegon Norrköping	Norrköping	Sweden	1	Swegon
Swegon Örebro	Örebro	Sweden	1	Swegon
Swegon Stockholm	Stockholm	Sweden	1	Swegon
Swegon Tomelilla	Tomelilla	Sweden	1	Swegon
Swegon Umeå	Umeå	Sweden	1	Swegon

Rows per page: 100 ▾ 1-14 of 14 < >

PH

Full oversikt over alle bygninger i organisasjonen din

- Bygningens navn
- Bygningens beliggenhet
- Antall produkter

# INSIDE Portal: Oversikt over tilkoblede enheter

Home > buildings > Swegon Kvänum

← GO BACK

## Swegon Kvänum

Kvänum, Sweden  
Latitude: 58.2980300699508  
Longitude: 13.189557

### Products

Search (name, serial number) 🔍

Name	Product type	Building	Serial number	Software version	Active alarm	Connected
Kvänum Tellus, Casa	GOLD	Swegon Kvänum	G00403364	2.42		●
Swegon Kvänum	WISE	Swegon Kvänum	6V5M1U5CIUTPHT38WDXD	1.160.1		●
TA/FA 37	GOLD	Swegon Kvänum	G320716	2.42		●

Rows per page: 10 ▾ 1-3 of 3 < >

### Rooms

### Building administrators

FR

Full oversikt over Swegons produkter i hver bygning

- Beliggenhet
- Programvareversjon
- Aktive alarmer
- Status for tilkobling

# INSIDE Portal: Overvåking av ytelse

← GO BACK EDIT NAME

## GOLD RXHC 12

Connected ●  
Software version: 2.42  
Serial number: 2006392391

### Information

**AHU status**

AHU status	Damper switch off delay
<b>Supply air</b>	
Supply air	15.9 °C
Supply air flow	803.0 l/s
Supply air fan power consumption	0.6 kW
Supply air duct pressure	112.5 Pa
<b>Supply filter</b>	
Supply air internal filter	106.7 Pa
Supply air internal filter alarm	0.0 Pa
<b>Extract air</b>	
Extract air	23.0 °C
Extract air flow	800.0 l/s
Extract air duct pressure	109.3 Pa
Extract air fan power consumption	0.5 kW
<b>Extract filter</b>	
Extract air internal filter	66.5 Pa

**Overvåk:**

- Driftsstatus
- Viktige parametere
- Energidata
- Alarm

*Live: alltid den nyeste verdien*

Temperature

°C

°F

Pressure

Pa

psi

in.wc

Airflow

l/s

cfm

m<sup>3</sup>/s

m<sup>3</sup>/h

# INSIDE Portal: Overvåking av ytelse

Energy	
Cool power recovery	0.0 kW
Specific fan power	1.4 kW/m <sup>3</sup> /s
Temperature efficiency	0.0 %
Heat power recovery	0.0 kW
Temperature efficiency	0.0 %
Heat exchange motor energy consumption since unit installation	0.2 MWh
Heat energy consumption since unit installation	12.0 MWh
Total Heat Cool energy consumption since unit installation	16.1 MWh
Total energy recovery since unit installation	59.6 MWh
Total air fan energy consumption since unit installation	8.4 MWh
Supply air fan energy consumption	1.3 MWh
Heat energy recovery since unit installation	59.2 MWh
Supply air fan energy consumption since unit installation	4.2 MWh
Extract air fan energy consumption	1.2 MWh
Total AHU energy consumption since unit installation	8.6 MWh
Heat exchange motor power consumption	0.0 kW
Extract air fan energy consumption since unit installation	4.2 MWh
Cool energy recovery since unit installation	0.5 MWh
Total AHU energy consumption	2.6 MWh
Heat exchange motor energy consumption	0.0 MWh
Cool energy consumption since unit installation	4.1 MWh

Alarms	
Alarm priority A triggered	0
Alarm priority B triggered	0

Detaljert informasjon om aktive alarmer

Alarms	
Name	Raised at
Info 98:7 Extract air air handling unit filter calibration not performed	2023-07-19 07:24
Info 98:5 Supply air air handling unit filter calibration not performed	2023-07-19 07:24

Rows per page: 100 1-2 of 2

# INSIDE Portal: Energirapporter



Home > buildings > Swegon Kvänum > Product: Kvänum Tellus, Casa

Connected ●  
Software version: 2.42  
Serial number: G00403364

### Information

### Reports

CREATE REPORT   DOWNLOAD REPORT ↓   DELETE REPORT(S)

Created	Status	From	To
<input checked="" type="checkbox"/> 2023-05-29 08:10	Completed	2023-05-01	2023-05-29
<input type="checkbox"/> 2023-05-10 07:54	Completed	2023-04-01	2023-05-02
<input type="checkbox"/> 2023-04-13 08:04	Completed	2023-03-17	2023-04-13
<input type="checkbox"/> 2023-04-11 13:48	Completed	2023-04-05	2023-04-10
<input type="checkbox"/> 2023-04-07 17:56	Completed	2023-03-16	2023-04-07
<input type="checkbox"/> 2023-03-27 10:17	Completed	2023-03-20	2023-03-27
<input type="checkbox"/> 2023-03-14 10:03	Completed	2023-03-06	2023-03-13

1 row selected   Rows per page: 10   1-7 of 7



### Uploads

Rask og enkel generering av energirapporter

# Energirapport


## Analyse av ytelse

Generer energirapporter med ønsket tidsintervall og detaljnivå.

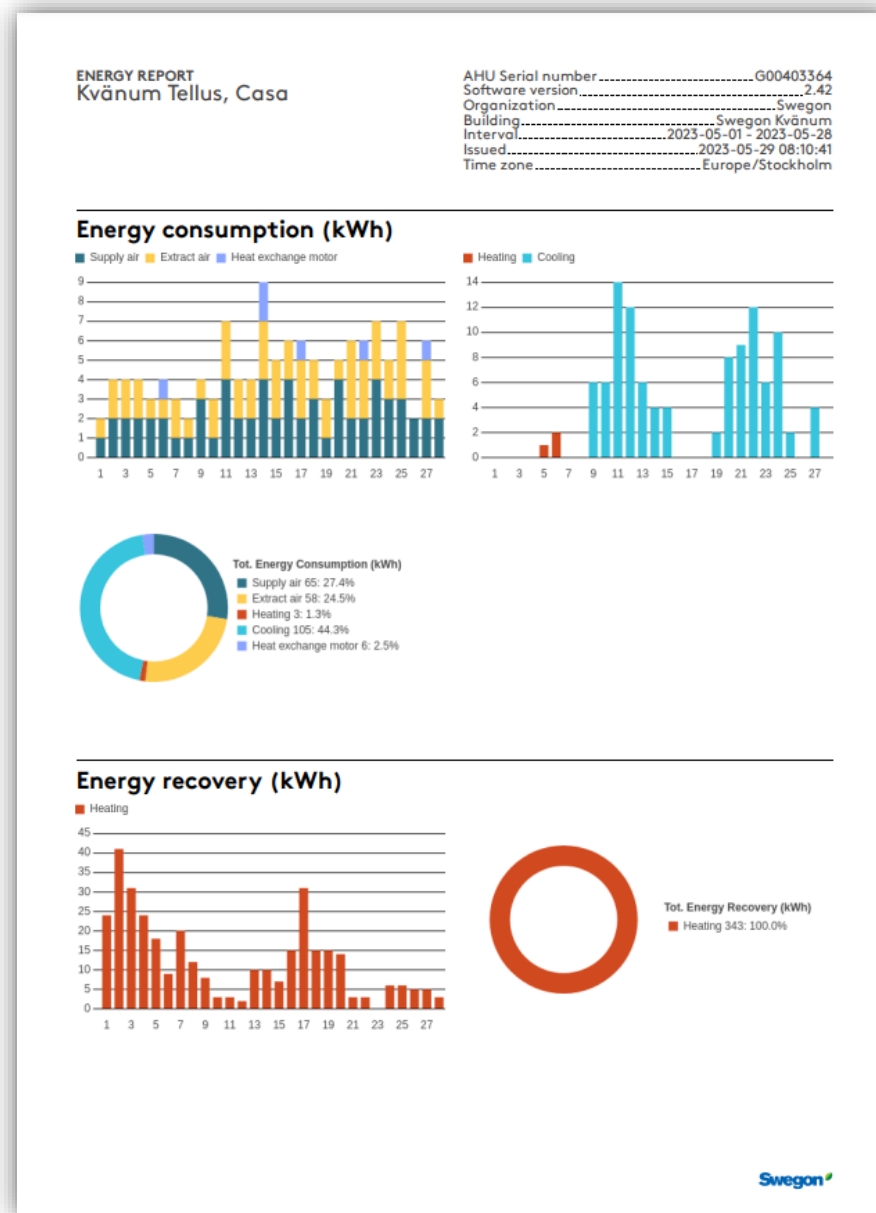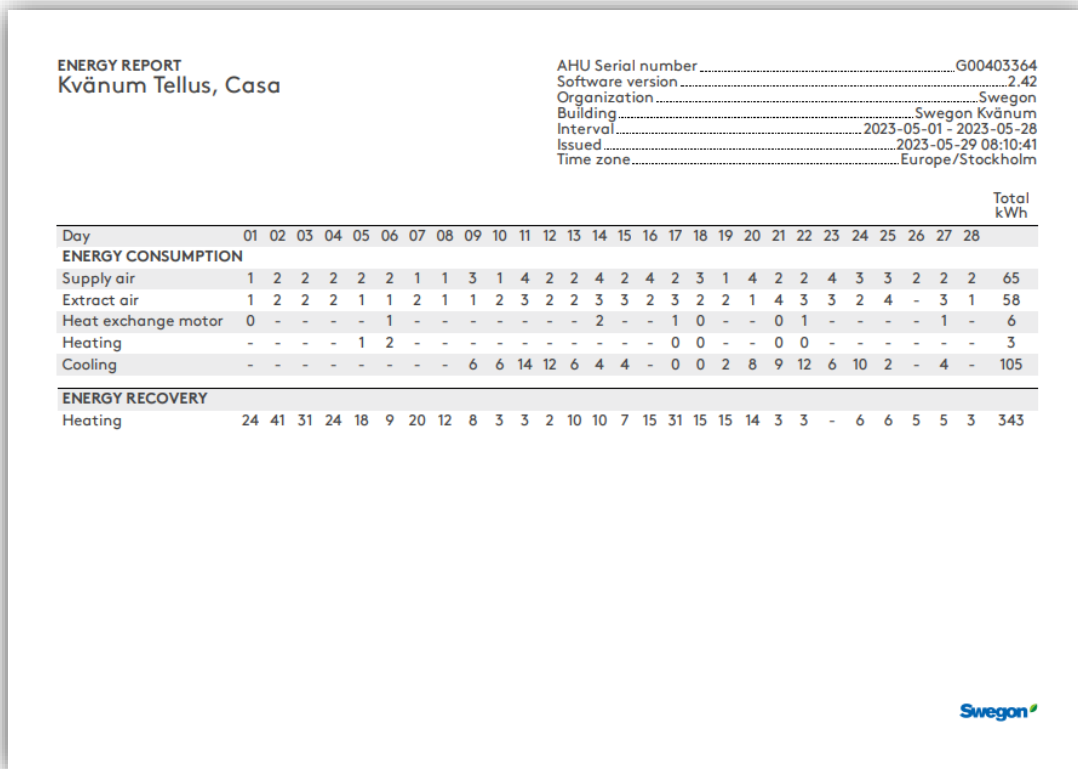

# INSIDE Portal: Logg inn

Lenke til INSIDE Portal: <https://inside.swegon.com/>

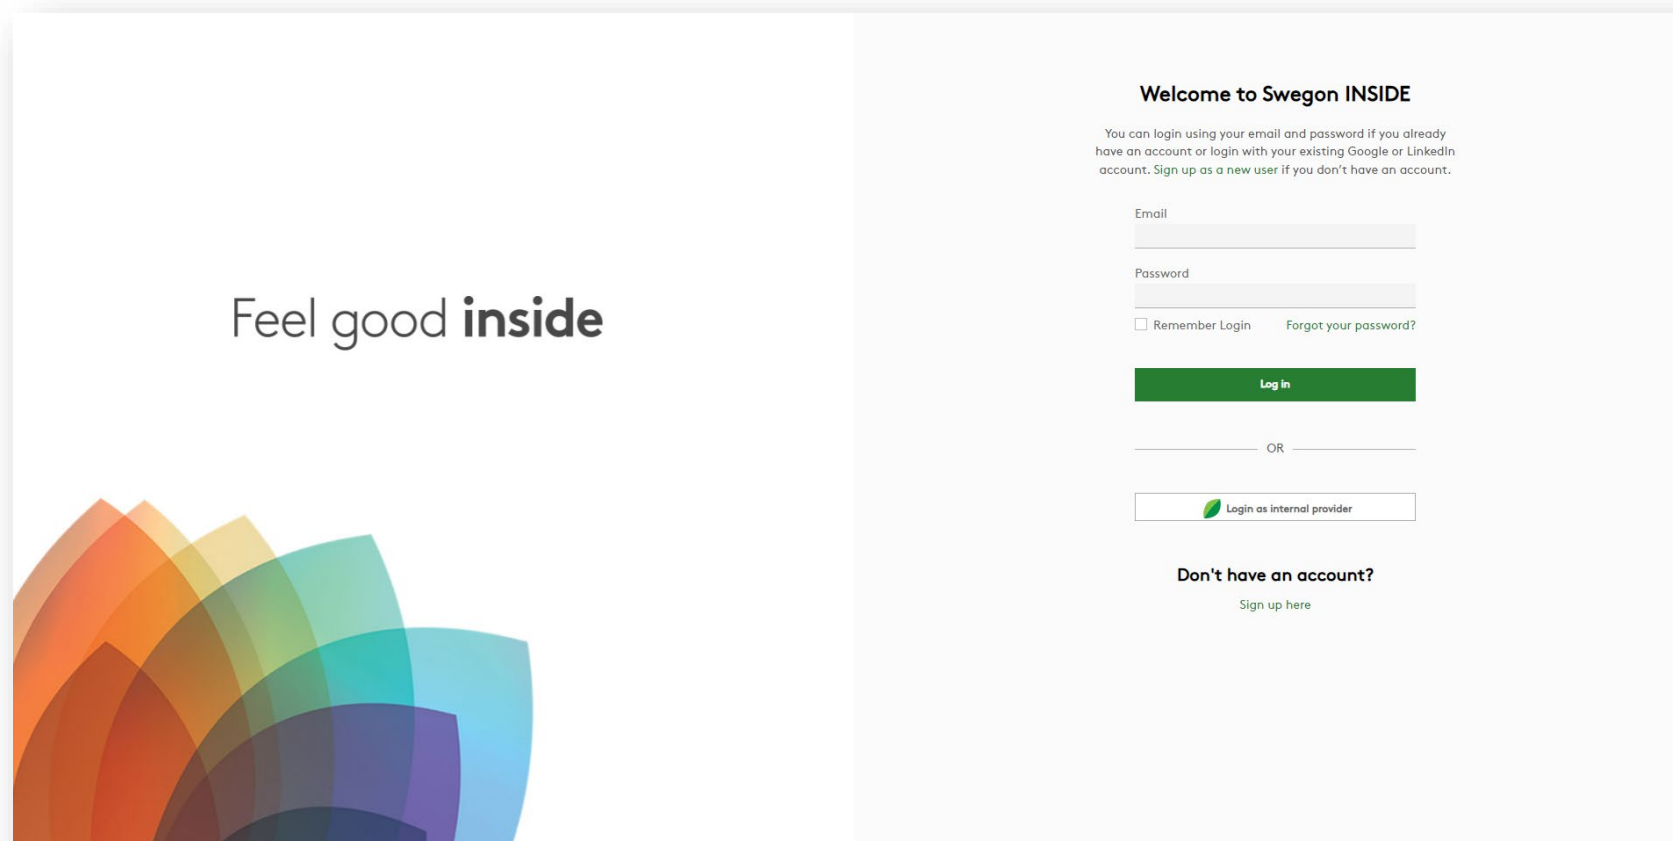

The screenshot shows the login interface for the Swegon INSIDE portal. On the left, there is a decorative graphic of overlapping semi-circles in various colors (orange, yellow, green, blue, purple) and the text "Feel good **inside**". On the right, the login form is titled "Welcome to Swegon INSIDE". It includes a welcome message, input fields for "Email" and "Password", a "Remember Login" checkbox, a "Forgot your password?" link, a green "Log In" button, an "OR" separator, and a "Login as internal provider" button. At the bottom, there is a "Don't have an account?" section with a "Sign up here" link.

Feel good **inside**

**Welcome to Swegon INSIDE**

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.


Email  
[input field]

Password  
[input field]

Remember Login    [Forgot your password?](#)

**Log In**


OR

 Login as internal provider

**Don't have an account?**  
[Sign up here](#)



# Flere måter å overvåke GOLD på

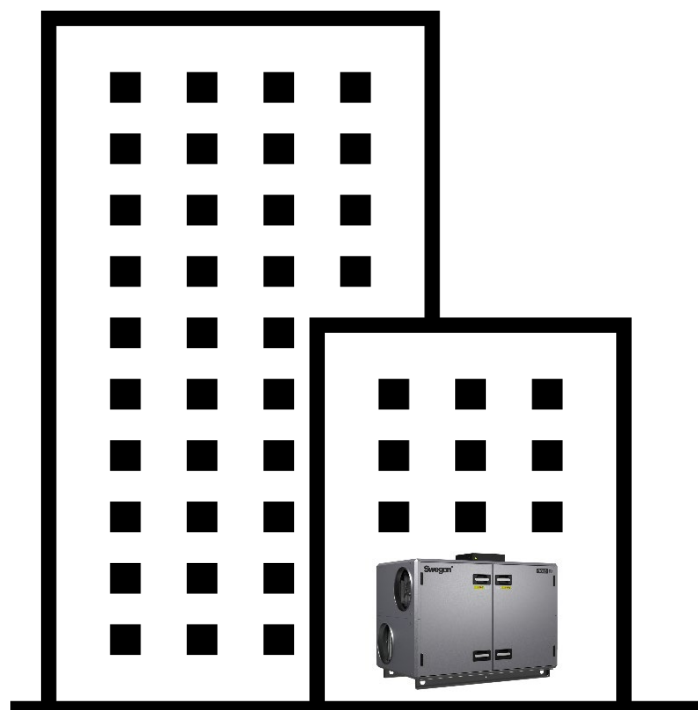

→  
4G-ruter  
Ethernet-tilkobling



## Swegon INSIDE

- Portal (gratis)
- Ekstra premium-tjenester

→  
Swegon Connect-ruter



## Swegon Connect

- Tilgang til GOLDs interne nettsted

→




## På enheten

- HMI
- Direkte tilgang til GOLDs interne nettsted via WiFi-tilgangspunkt



# Digitale tjenester

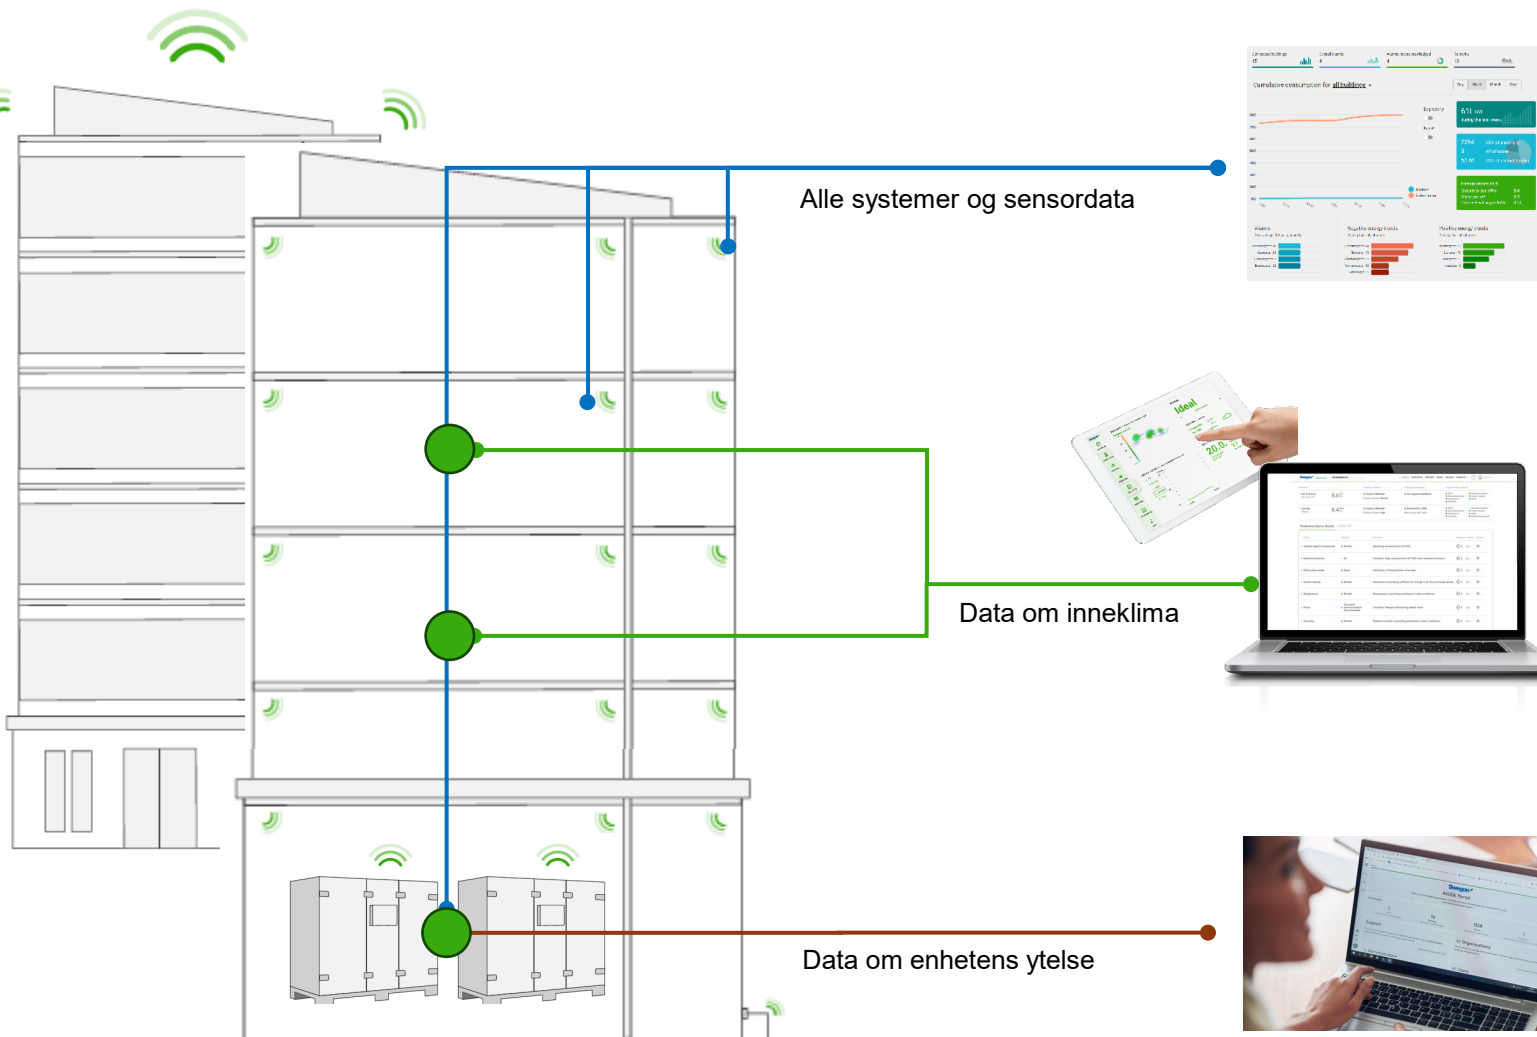

## INSIDE Director

Kombinasjon av BMS- og EMS-funksjoner for en komplett bygningsmasse.

## INSIDE Analytics & Visualiser

Analyse og visualisering av inneklimaet.

## INSIDE Portal

Fjernovervåking av nøkkelparametere, aktive alarmer og energiforbruk i aggregatet.

**Swegon** 





Feel good **inside**